


 **EUROCOMACH®**

---

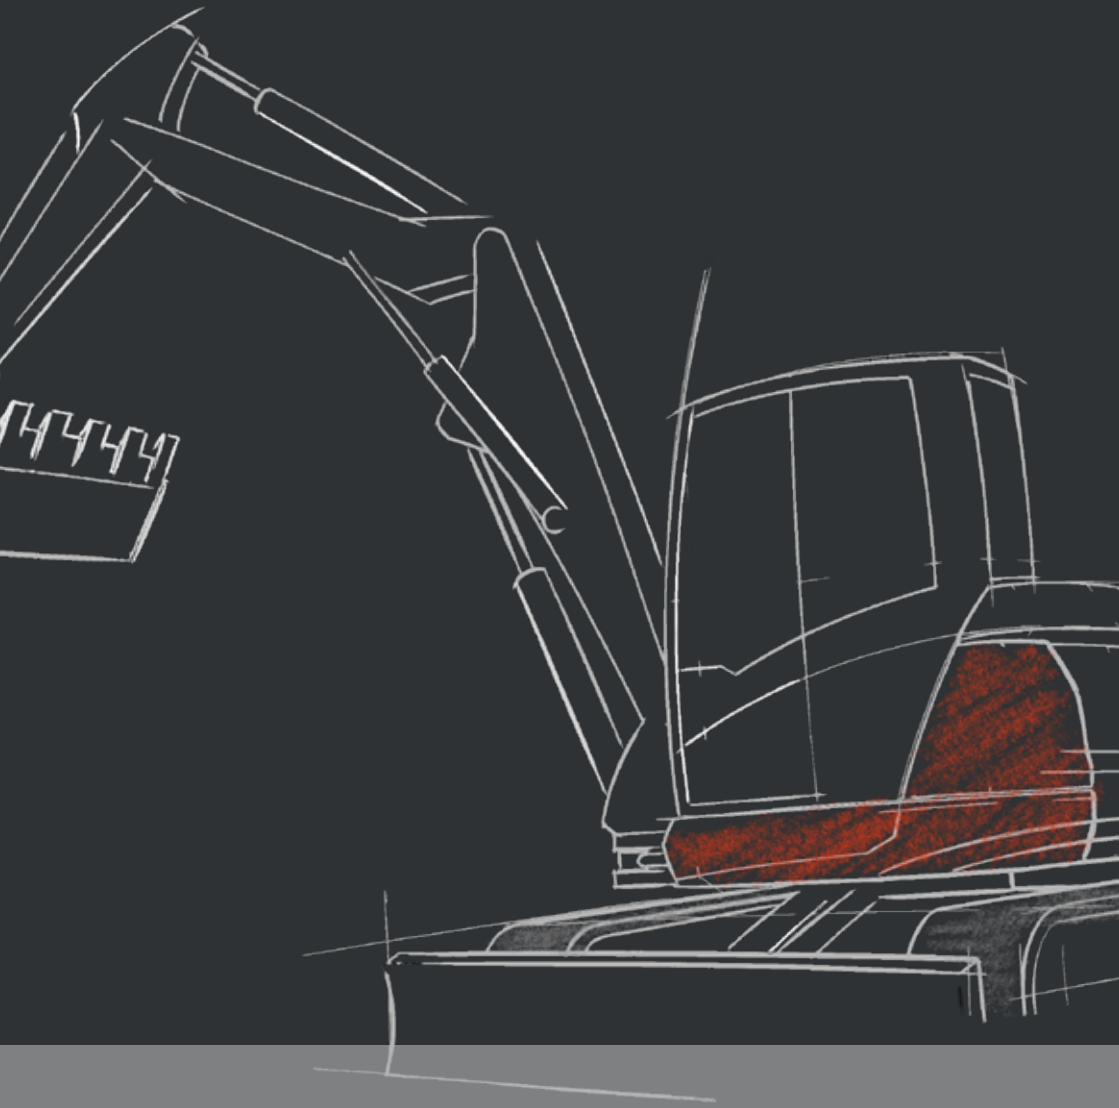

**LA GAMMA** | THE RANGE, LA GAMME  
MODELL ÜBERSICHT, LA GAMA

# MINI-ESCAVATORI

MINI-EXCAVATORS, MINI-PELLES  
MINIBAGGER, MINI-EXCAVADORAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>10ZT</b>	1.060 kg (2,337 lb)	YANMAR STAGE 5	7,6 kW - 10,0 HP	1.620 mm (63.8 in)	min. 760 mm (29.9 in) max. 990 mm (39.0 in)
<b>12ZT</b>	1.160 kg (2,557 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	1.860 mm (73.2 in)	min. 790 mm (31.1 in) max. 1.050 mm (41.3 in)
<b>14SR</b>	1.230 kg (2,712 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	2.045 mm (80.5 in)	min. 790 mm (31.1 in) max. 1.050 mm (41.3 in)
<b>18ZT</b>	1.730 kg (3,813 lb)	YANMAR STAGE 5 - TIER 4 FINAL	11,2 kW - 15,2 HP	2.300 mm (90.6 in)	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
<b>22SR</b>	2.190 kg (4,828 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	2.465 mm (97.0 in)	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
<b>24SR</b>	2.360 kg (5,203 lb)	YANMAR STAGE 5 - TIER 4 FINAL	14,0 kW - 19,0 HP	2.493 mm (98.2 in)	1.450 mm (57.1 in)
<b>25ZT</b>	2.540 kg (5.401lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	2.725 mm (107.2 in)	1.500 mm (59.1 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>28ZT</b>	2.700 kg (5,952 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	2.660 mm (104,7 in)	1.550 mm (61.0 in)
<b>35ZT</b>	3.350 kg (7,385 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	2.880 mm (113.3 in)	1.580 mm (62.2 in)
<b>ES50ZT</b>	5.150 kg (11,354 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.600 mm (141.7 in)	1.980 mm (78.0 in)
<b>ES57ZT</b>	5.600 kg (12,345 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.850 mm (151.6 in)	1.980 mm (78.0 in)
<b>ES60TR</b>	6.050 kg (13,337 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	3.950 mm (155.5 in)	1.980 mm (78.0 in)
<b>60ZT</b>	5.700 kg (12,566 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	45,0 kW - 61,2 HP	3.850 mm (151.6 in)	1.980 mm (78.0 in)

# MIDI-ESCAVATORI | MIDI-EXCAVATORS, MIDI-PELLES MIDIBAGGER, MIDI-EXCAVADORAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>65TR</b>	6.200 kg (13,669 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	45,0 kW - 61,2 HP	3.950 mm (155.5 in)	1.980 mm (78.0 in)
<b>ES85SB</b>	8.300 kg (18,298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	3.800 mm (149.6 in)	2.320 mm (91.3 in)
<b>85SB</b>	8.300 kg (18,298 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	3.800 mm (149.6 in)	2.320 mm (91.3 in)
<b>ES85ZT</b>	9.000 kg (18,298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.270 mm (168.1 in)	2.320 mm (91.3 in)
<b>90ZT</b>	9.000 kg (18,298 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.270 mm (168.1 in)	2.320 mm (91.3 in)
<b>ES90UR</b>	9.100 kg (20,062 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.220 mm (166.1 in)	2.320 mm (91.3 in)
<b>95UR</b>	9.100 kg (20,062 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.220 mm (166.1 in)	2.320 mm (91.3 in)
<b>ES95TR</b>	9.900 kg (21,825 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.570 mm (179.9 in)	2.320 mm (91.3 in)
<b>100TR</b>	9.900 kg (21,825 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	4.570 mm (179.9 in)	2.320 mm (91.3 in)

• Turbo





# PALE COMPATTE GOMMATE

COMPACT WHEELED LOADERS, CHARGEUSES SUR PNEUS,  
REIFENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE RUEDAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>ESK150.5</b>	2.750 kg (6,063 lb)	CUMMINS STAGE 3A - TIER 4 INTERIM	48,0 kW - 64,4 HP	680 kg (1,499 lb)	1.550 mm (61.0 in)
<b>17SK</b>	3.600 kg (6,834 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	50,0 kW - 67,1 HP	1.080 kg (2,381 lb)	1.680 mm (66,1 in)
<b>ESK190</b>	4.350 kg (8,598 lb)	• YANMAR STAGE 3A - TIER 3	63,9 kW - 86,9 HP	1.450 kg (3,638 lb)	1.860 mm (72,4 in)
<b>19SK</b>	4.350 kg (8,598 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	1.450 kg (3,638 lb)	1.860 mm (72,4 in)

• Turbo

# PALE COMPATTE CINGOLATE

COMPACT TRACKED LOADERS, CHARGEUSES SUR CHENILLES,  
RAUPENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE CADENAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>ETL160.5</b>	3.500 kg (7,716 lb)	CUMMINS STAGE 3A - TIER 4 INTERIM	48,0 kW - 64,4 HP	1.100 kg (2,425 lb)	1.680 mm (66.1 in)
<b>18TL</b>	4.300 kg (9,039 lb)	• KUBOTA STAGE 5 - TIER 4 FINAL	50,0 kW - 67,1 HP	1.840 kg (4,057 lb)	1.760 mm (69.3 in)
<b>ETL200</b>	5.470 kg (12,059 lb)	• YANMAR STAGE 3A - TIER 3	63,9 kW - 86,9 HP	2.572 kg (5,670 lb)	2.110 mm (83.1 in)
<b>20TL</b>	5.470 kg (12,059 lb)	• YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	2.572 kg (5,670 lb)	2.110 mm (83.1 in)

• Turbo





Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>ESP22SR</b>	1.820 kg (4,012 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
<b>ESP24SR</b>	2.100 kg (4,630 lb)	YANMAR STAGE 5 - TIER 4 FINAL	14,0 kW - 19,0 HP	1.450 mm (57.1 in)
<b>ESP25ZT</b>	2.250 kg (4,960 lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	1.500 mm (59.1 in)
<b>ESP28ZT</b>	2.800 kg (6,173 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	1.550 mm (61.0 in)
<b>ESP35ZT</b>	3.050 kg (6,764 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	1.580 mm (62.2 in)

• Range in progress





Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
<b>ESP50ZT</b>	4.900 kg (10.803 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	1.980 mm (78.0 in)
<b>ESP60ZT</b>	5.200 kg (11.464 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	1.980 mm (78.0 in)
<b>ESP100ZT</b>	9.220 kg (20,327 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
<b>ESP100UR</b>	8.720 kg (19,224 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
<b>ESP100ZT4</b>	9.220 kg (20,327 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
<b>ESP100UR4</b>	8.720 kg (19,224 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

• Range in progress



# EUROCOMACH<sup>®</sup>

## Attachments

*Increase your productivity*



For more information about the new line of customized Eurocomach equipment, contact your sales representative.





**Sampierana S.p.A.**

Via Leonardo da Vinci, 40

47021 S. Piero in Bagno (FC) - ITALY

Tel. +39 0543 904211

[www.eurocomach.com](http://www.eurocomach.com)



**COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =**

The information contained in this document is of general nature. Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products. For instructions on the correct use of the products, see the use and maintenance manual. Sampierana S.p.A. shall not be held responsible for any damage to people and/or property, if the instructions contained in the use and maintenance manual are not complied with.